

Foot Valves

Model 50-201 Brass Foot Valves

EBW's foot valves are used to maintain the prime in suction system fuel lines. The Foot valves are installed at the bottom of the suction pipe at the bottom of an underground storage tank.


EBW's single poppet foot valves are typically used where easy access to the valve is available. Double poppet models offer twice as much protection for maintaining the prime. Both 1 1/2 inch models can be used with EBW's model 320 extractor fittings.

Features


- Metal to metal poppet seating
- 24 mesh screen protects the valve from debris
- All valves are pressure tested to ensure accuracy



Single Poppet



Double Poppet

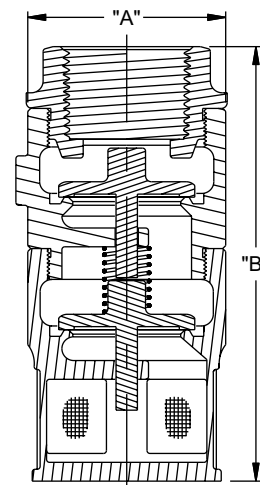

Part no.	Thread Size	Poppet Type	Weight		Dim A		Dim B	
			Lbs.	Kg.	in.	mm.	in.	mm.
50-105-01	1/2"	Single	.75	.34	1.44	37	2.75	70
51-100-01	1/2"	Double	1.18	.54	1.44	37	4	102
75-105-01	3/4"	Single	.94	.43	1.69	43	2.75	70
76-100-01	3/4"	Double	1.31	.60	1.69	43	4	102
100-105-01	1"	Single	1.12	.51	2	51	3	76
101-100-01	1"	Double	1.56	.71	2	51	4.25	108
150-202-01	1 1/2"	Single	3.12	1.42	2.75	70	4.25	108
151-200-01	1 1/2"	Double	4.38	1.99	2.75	70	5.38	137
200-200-01	2"	Single	4.38	1.99	3.44	87	4.88	124
201-200-01	2"	Double	6.44	2.92	3.44	87	6.75	172

* BSPT thread available-consult factory

Materials

Body: Brass

Poppet: Brass

Screen: 24 Mesh Brass

